


Datenblatt ACX 635-... /ACX 636-... /ACX 637-... /ACX 638-...

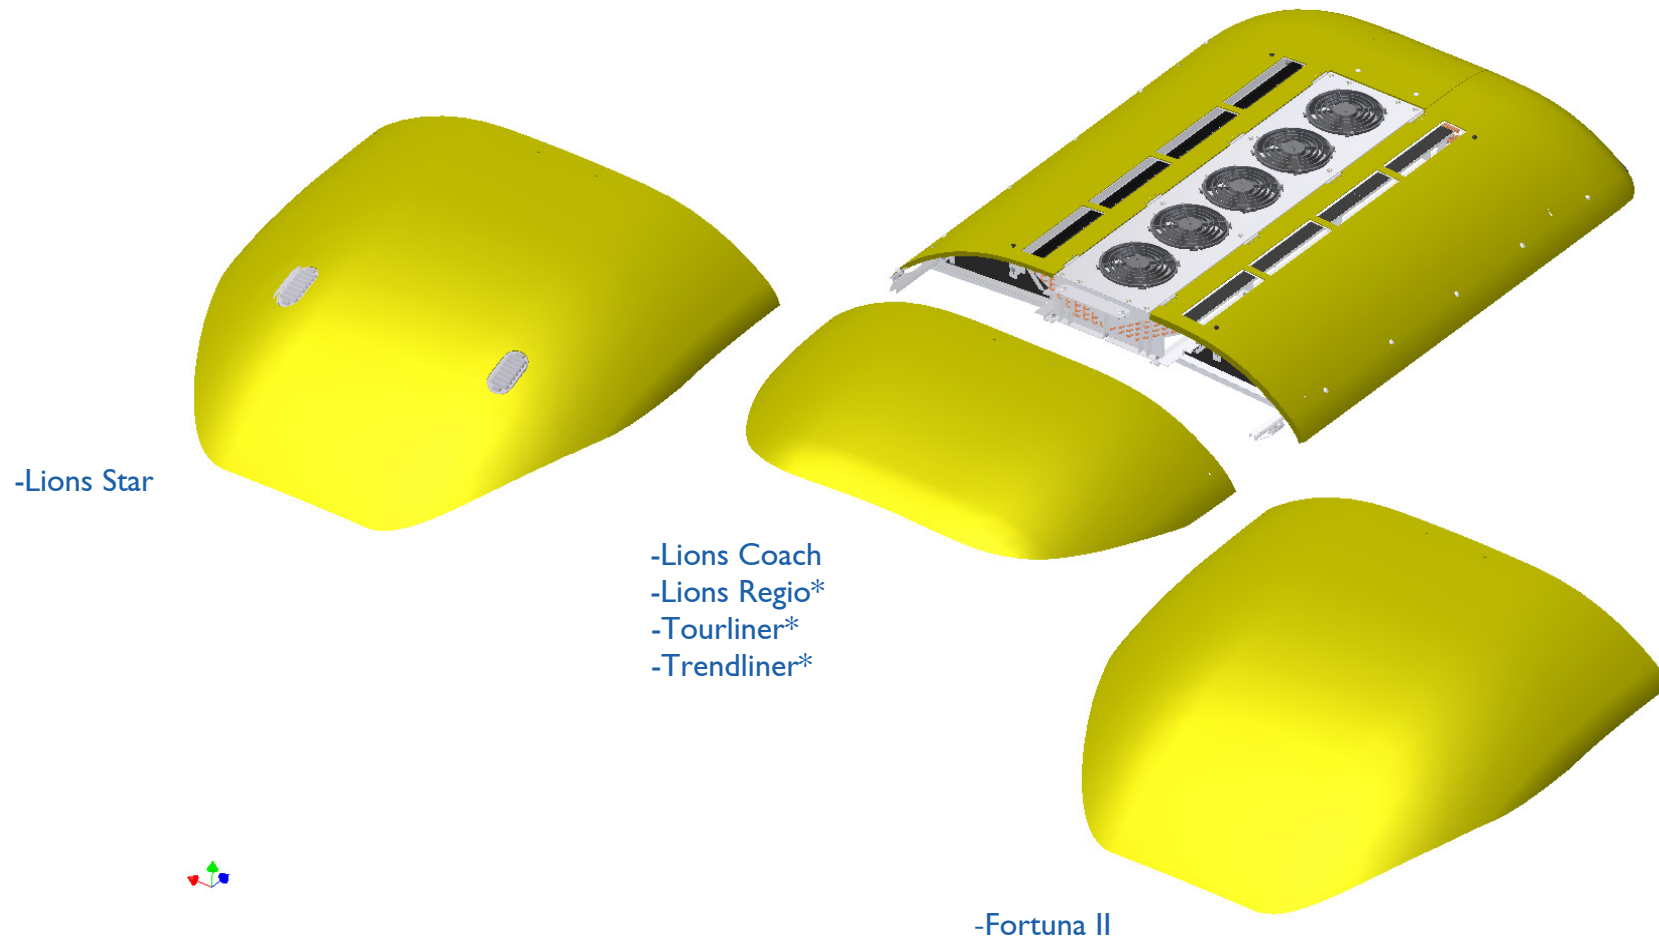

* = Fronthaube nicht im Lieferumfang von Konvekta enthalten

Datenblatt ACX 635-... /ACX 636-... /ACX 637-... /ACX 638-...

Anlage	140SV197 83.77972-6575	140SV365K 83.77971-6565	140SV468K 83.77971-6586	140SV198K 83.77972-6578	140SV353K 83.77971-6572	140SV231K 83.77972-6585	140SV357K 83.77971-6557	140SV416K 83.77971-6578	140SV342K 83.77971-6552	140SV356K 83.77971-6559	140SV366K 83.77971-6567	140SV415K 83.77971-6577	140SV525K 83.77971-6620
Typ	ACX 635	ACX 635-1	ACX 635-2	ACX 636	ACX 636-1	ACX 637	ACX 637-1	ACX 637-2	ACX 638	ACX 638-1	ACX 638-2	ACX 638-3	HZX 636-1
Fahrzeug	Lions Coach R07/09/08	Lion Star R07/08/09	Fortuna II R07/08/09	Tourliner P21/20/22	Lions Regio R12/14/13 Trendliner P23/25/24	Lions Coach R07/08/09	Tourliner P21/22	Lions Regio R12/14/13 Trendliner P23/25/24	Tourliner P20/21/22	Lions Coach R07/09/08	Lion Star R07/09/08	Lions Regio P12/14/13 Trendliner P23/25/24	Lions Regio R12/14/13 Trendliner P23/25/24
max.Kälteleistung in Watt	33.000	33.000	33.000	33.000	33.000	38.000	38.000	38.000	35.000	35.000	35.000	35.000	-
nom.Kälteleistung in Watt	24.000	24.000	24.000	24.000	24.000	28.000	28.000	28.000	26.000	26.000	26.000	26.000	-
max. Außentemperatur in °C	55	55	55	55	55	55	55	55	55	55	55	55	55
Heizleistung bei Q 100	40.000	40.000	40.000	40.000	40.000	-	-	-	43.000	43.000	43.000	43.000	40.000
Verdampfer-Luftleistung m3/h**	6.300	6.300	6.300	6.300	6.300	8.400	8.400	8.400	8.400	8.400	8.400	8.400	6.300
Stromaufnahme in A bei 26V	90	90	90	90	90	115	115	115	115	115	115	115	60
Abmessungen L/B/H in mm	3755 2094 258	4362 2094 258	4362 2094 258	2670 2094 258	2690 2094 258	3755 2094 258	2670 2094 258	2690 2094 258	2670 2094 258	3755 2094 258	4362 2094 258	2670 2094 258	2670 2094 258
Gewicht in Kg	230	238	238	215	217	255	240	242	240	255	263	242	90
Kompressor	KVX40/560-K	KVX40/560-K	KVX40/560-K	KVX40/560-K	KVX40/560-K	KVX40/560-K	KVX40/560-K	KVX40/655-K	KVX40/655-K	KVX40/655-K	KVX40/655-K	KVX40/655-K	-